

### Description

Apsys Versatile series free standing cabinets are New Generation Rack Cabinets featuring (19")<sup>3</sup> design. The only available boundary in terms of functionality and flexibility is the imagination as it is possible to install all kinds of 19" accessories, instruments and equipment to the top, bottom and side sections of the cabinet. Capacity advantage The rear sections of instruments and equipment with short length (patch panel, horizontal organizer, etc.) remain completely unoccupied at certain U heights, and lead to waste of space. In Versatile series cabinets, on the other hand, it is possible to install accessories and equipment with higher length from side panels at the cabinets with U values where equipment with short length are installed.

#### ORANMENT STRIP COLOR



Light Red



Light Green



Black RAL 9004



Gray RAL 7035

#### BODY COLOR



### Features

- Exquisite design with precision measurement and craftsmanship
- Blue Zinc mounting profiles, free of static
- Toughened glass front door with obliquely vented door border and three section vented rear door
- Adjustable feet and heavy duty castors are available simultaneously
- Cable entry on the top cover and bottom panel with adjustable sizes
- Optional installation of plinth to enable cabinets fixation under base entry cable entry/ ventilation
- Removal side panel for easy maintenace
- The standard front door model for W = 800 Versatile cabinets is the vertically split full length double glass door model with aluminum extruded frame.
- Front glass door is 4mm thick, smoke colored, antistatic, empered full length glass with high resistance against shattering with handled lock.
- The lock mechanism is barrel lock type mechanism.
- The colored PVC stripe installed on the aluminum glass frame complements the appearance.

Comply with customers design




## Standards & Compliances

- IEC 297-1
- IEC 297-2
- TS EN 61587-1
- CE,RoHS
- Environment Friendly
- 100% Recyclable.

## Load Capacity

- Static Loading : 2000Kg (with adjustable feet)

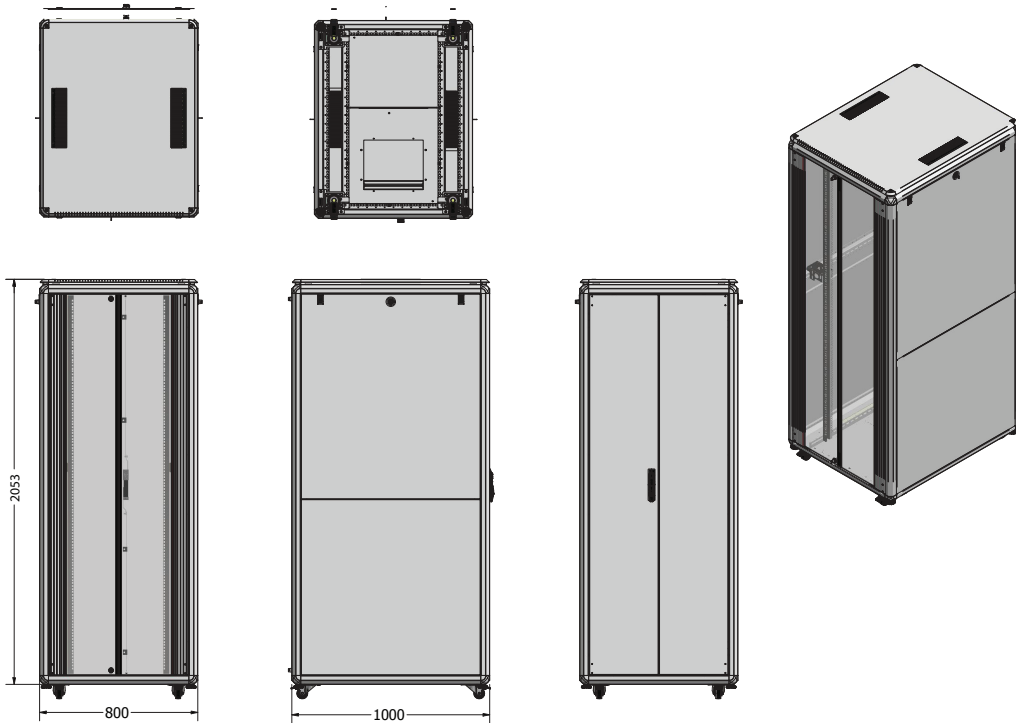

## ORDERING INFORMATION

PART NUMBER	WIDTH	DEPTH	HEIGHT
APFSV-6618	600	600	1000
APFSV-6818	600	800	1000
APFSV-6118	600	1000	1000
APFSV-8818	800	800	1000
APFSV-8118	800	1000	1000